


Cary Industries
 10401 Baur Blvd Ste A
 Olivette, MO 63132
 314 432-6160
 Fax 432-5955

CCon(Convoluted Split Nylon Tubing)

Cary Industries Convoluted Split Nylon Tubing permits fast, easy installation and protection of harness and cable assemblies. Its full length slit along the tubing allows quick installation of an assembly while the corrugated design of the material closes for a permanent covering. The slit also allows for any number of break-outs within the assembly.

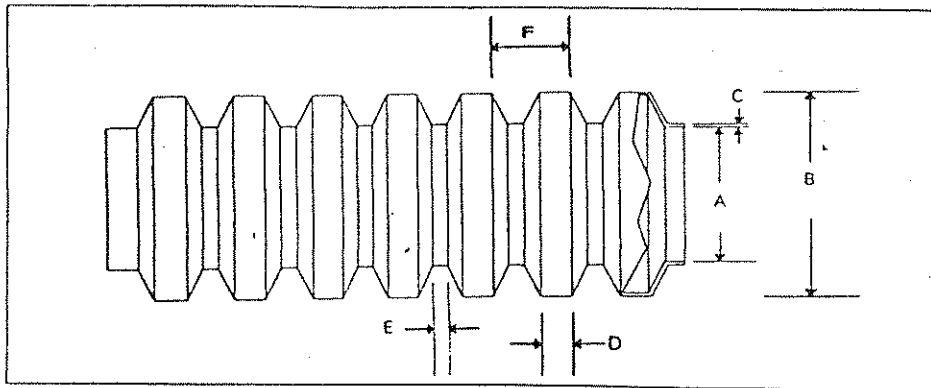

Nominal Diameter	Dimension A Inside Diameter		Dimension B Outside Diameter		Dimension C Wall Thickness		Dimension D Outside Rib Width		Dimension E Inside Rib Width		Dimension F Convolute Pitch	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm
1/8"	.167	4.24	.272	6.91	.004	.11	.053	1.35	.013	.33	.111	2.83
1/4"	.256	6.50	.373	9.47	.004	.11	.076	1.93	.024	.61	.106	2.69
3/8"	.405	10.29	.526	13.36	.005	.12	.064	1.63	.037	.94	.123	3.12
1/2"	.505	12.83	.670	17.02	.005	.12	.070	1.78	.040	1.02	.123	3.12
5/8"	.650	16.51	.816	20.73	.005	.12	.080	2.03	.032	.81	.131	3.33
3/4"	.760	19.30	.935	23.75	.005	.12	.070	1.78	.040	1.02	.141	3.57
1"	1.055	26.80	1.345	34.16	.006	.15	.081	2.06	.037	.94	.143	3.63
1-1/2"	1.550	39.37	1.850	46.99	.006	.15	.105	2.67	.045	1.14	.179	4.55

Standard Color: Black; Standard put-up: 100ft coils;
 Also available(minimums required):bulk put-ups, other colors, polyethelene, non-slit product.

Test	Procedure	Specifications
Melting Point	ASTM D789	210C-225C
Specific Gravity	ASTM D792	1.10-1.18
Moisture Content, Max	ASTM D789	.3%
Relative Viscosity, Min	ASTM D789	30
Tensile Strength, Min	ASTM D638	8120 PSI
Elongation, Min	ASTM D638	40%
Impact Strength, IZOD, Min	ASTM D256	.8 FTLB/IN
Flex Modulus	ASTM D790	170-250 PSI (IN 1000's)
Melt Flow Index	ASTM D1238	2.00-5.00